


# Unichrome Dove Bar Mixer with Diverter

thermostatic mixer shower



Dimensions given are approximate

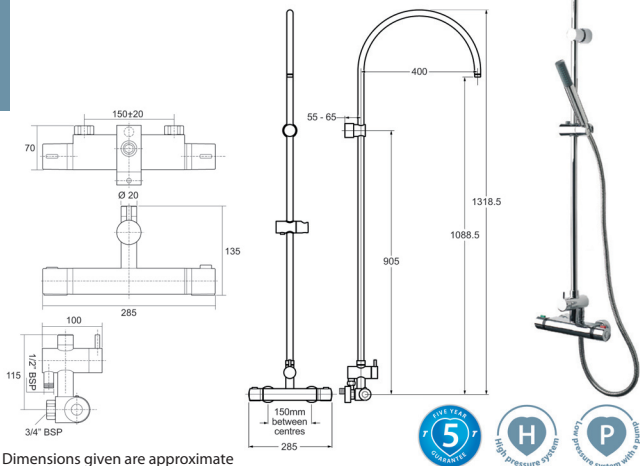

## Operating Features

- Thermostatic to within 2°C
- Automatic shutdown if hot or cold supplies fail
- Separate flow and temperature controls
- Diverter control to switch water between showerhead
- Adjustable maximum temperature stop
- Large fixed showerhead
- Microphone showerhead – 1 spray pattern

Temperature Control	Thermostatic
Plumbing System Compatibility	High pressure or low pressure with a pump
Inlet Connections	1/2" BSP to 3/4" flat face union
Water Entry Points	Back
Outlet Connection	1/2" BSP bottom
Minimum Running Pressure/Flow	0.5 Bar @ 8l/min
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Open Outlet Flowrate at 0.5 Bar	4l/min
Pipe Inlet Centres	130-150mm
Approvals, Complies with	BS-En 1111, 1287
Guarantee	5 years

Finish	Code
Chrome	UNDOETHBMDIV